



### Compact Sensor, Air Purged

Miltec P/N	Model
050-60587	CS-1




### Compact Sensor

Miltec P/N	Model
050-60585	CS-2




- Improved optics virtually eliminates solarization
- Small size for installation in tight spaces
- Squared body design for easy mounting
- For use with most lamp makes and types
- Sealed optics to prevent contamination
- Ported for air purge to keep optical path clear
- Lamp on indicator for power supply interlock (FS type)
- Compatible with EIT monitoring equipment such as Multibrite, Online UV Intensity Display and DIN Rail mount UV Sensor

### Wavelength Bandwidth

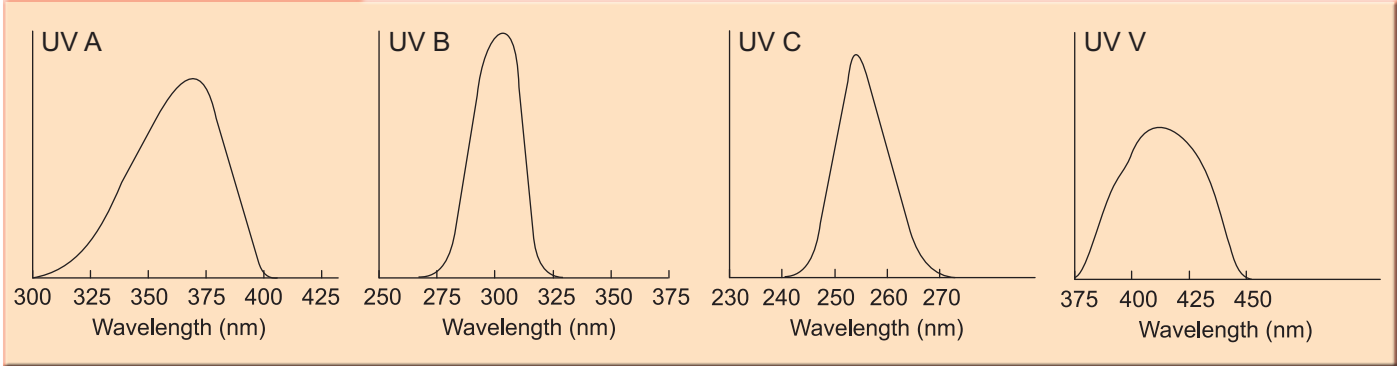

### 100% Transmission

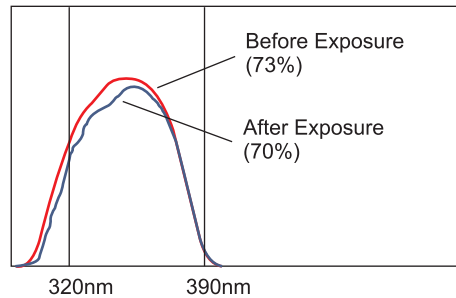

UV A response after 2300 hours of direct exposure to a 600 watt per inch lamp.

